


7. Color Measurement




YAV90CLR
6200.29
 16 Channel XYZ Colour and intensity meter with calibration system

- › CAN bus or USB controlled
- › Calibrated RGB source
- › Calibrated POF leads
- › F.O. Connectors
- › Form A

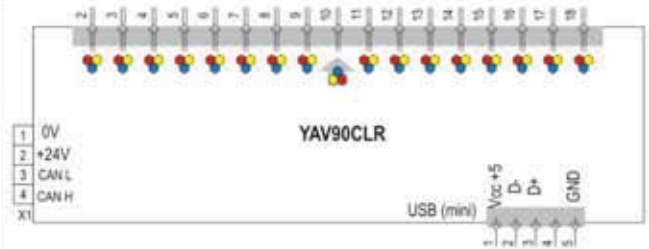


YAV91CLR
6200.29
 16 Channel XYZ Colour and intensity meter with calibration system

- › Plastic housing for Stand alone applications
- › CAN bus or USB controlled
- › Calibrated RGB source
- › Calibrated POF leads
- › F.O. Connectors

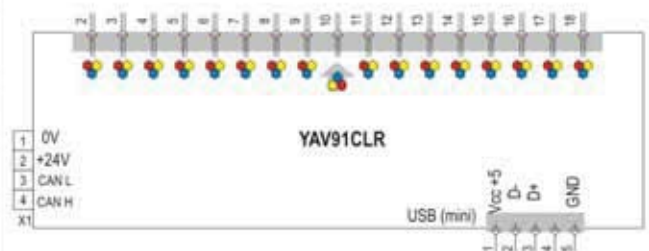

YAV90CLR10
6200.29
 Fiber Optic heads

- › 5 mm D Aspherical lens head
- › High adjustable support
- › 600 mm fiber optic length

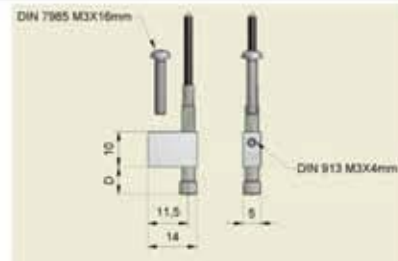

8. Self Test Diagnostic Fixtures



H7200_78xx
7200.78
 Self Test Diagnosis Fixture

- › CAN bus controlled
- › Not Standard Product. Configured under switching specifications

- H7200_7806 Skeeter
- H7200_7812 Gemini12
- H7200_7818 Gemini 12X
- H7200_7825 9025
- H7200_7850 9050

Applications:

- › Detect fails in complex switching and I/O boards

