


> 11. Interface



YAV90TC1
6200.36
Terminal block sockets
interface to VPC 90.

- > Pitch 7.62, 7.5, 5.08, 5, 3.92
and 3.5 mm
- > Form C

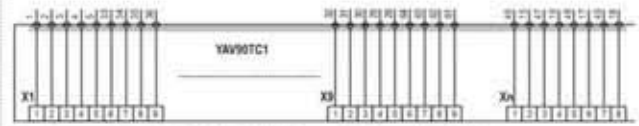


Pin numbers are only as example. The board terminal blocks are customized according specifications.





YAV90TC2
6200.37
Connectors Interface to
VPC 90

- > Sub-d-9, Sub-d-15, Sub-d-25,
Sub-d-35, Sub-d-50, RJ12,
RJ45, ...
- > Form C

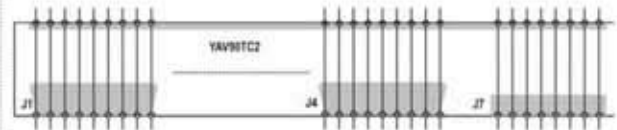

YAV90Q04
6200.54
4x I_{DC} 50 to Quadrapaddle
192 pins Interface

- > Cables set P/N J62005400
(order Separately)
- > 4x 2 Mini-D50 x 400 mm

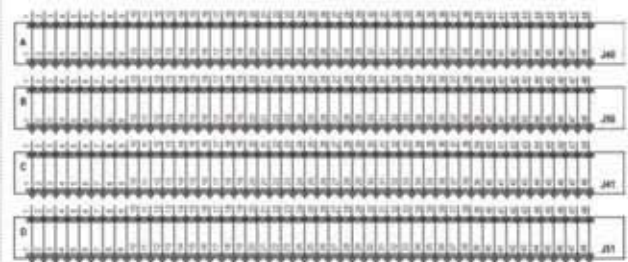

YAV9COM6
6200.24
COMM Interface


- > 6x Sub-D-9
- > 1x RJ45
- > 1x Two pole terminal block
- > Form D




J90USBI
7200.98
USB to 90 Series interface

- > Required Tripaddle Module
VPC 510 104 136

Config RBU2

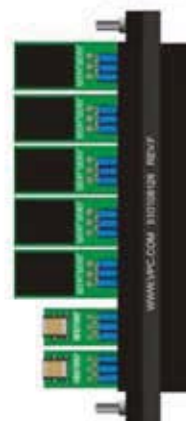

Config RBU1

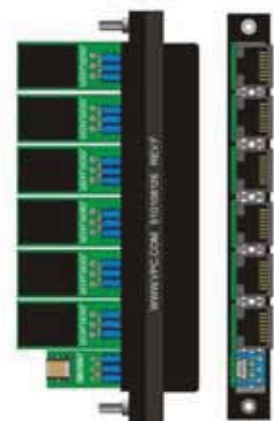

J90RJ45T
7200.98
RJ45 (Ethernet 100 Base T)
to 90 Series interface

- > Direct interface with RJ45 NI
RJ45 serial ports (RS232C,
RS422, RS485)
- > Required Tripaddle Module
VPC 510 104 136