


## i2 Micro iCon Hybrid Receiver

### Specifications


Weight	.25 lbs [.11 Kg]
Frame Material	Glass Reinforced Thermoplastic
Hardware Material	Stainless Steel Alloy
Available Contact Positions	120 Signal, 12 Micro Coax/Power
Cycle Life	10,000 Cycles
Temperature	-55° C to 105° C

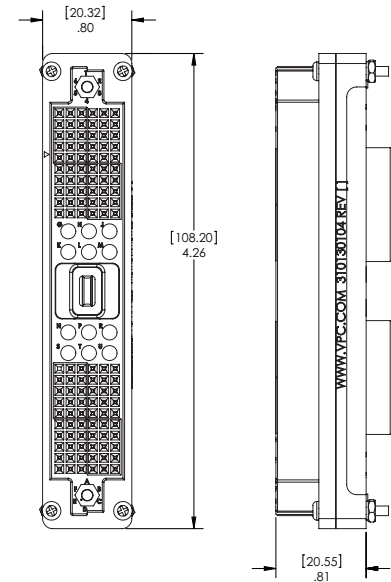

## i2 Micro iCon Hybrid ITA

### Specifications

Weight	.25 lbs [.11 Kg]
Frame Material and Clamp Housing	Glass Reinforced Thermoplastic
Latch Material	Nickel Plated Beryllium Copper
Backshell	Glass Reinforced Thermoplastic
Cable Clamp Material	Powder-Coated Aluminum
Available Contact Positions	120 Signal, 12 Micro Coax/Power
Cycle Life	10,000 Cycles
Temperature	-55° C to 105° C

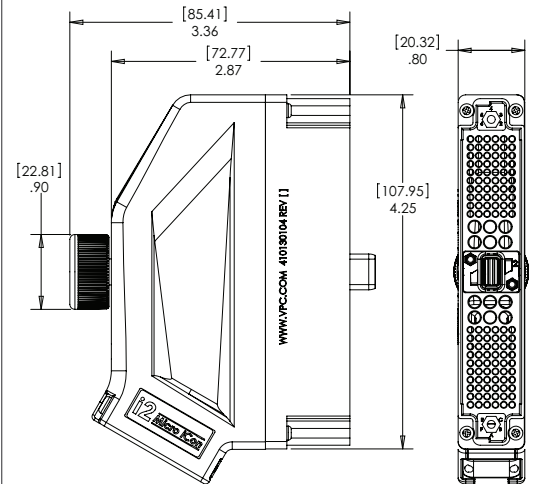

### Part #

### Description

#### RECEIVERS

310 130 104  
310 130 105

Receiver, i2 Micro iCon, 120/12 Position Hybrid, Loaded with 610 138 100 Twin Female Contacts  
Receiver, i2 Micro iCon, 120/12 Position Hybrid, for Crimp Contacts

#### ITA

410 130 104

ITA, i2 Micro iCon, 120/12 Position Hybrid

#### ACCESSORIES

310 113 569  
410 112 924

Protective Cover, i2 Micro iCon, Receiver  
Protective Cover, i2 Micro iCon, ITA